
# CONVENTIONAL FLOODED MOTORCYCLE BATTERY

LB16AL-A2 (12V16Ah)

LEOCH BATTERY

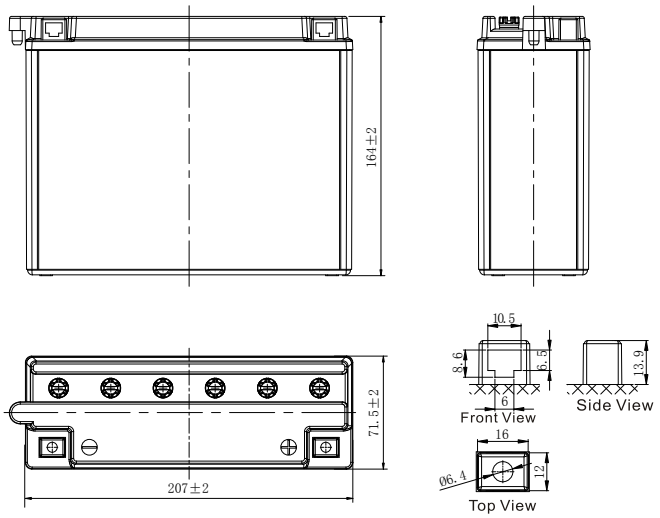



## CHARACTERISTICS

| Item | | Specifications |
|---|---|---|
| Nominal Voltage | | 12V |
| Nominal Capacity (10HR) | | 16Ah |
| Cold Cranking Performance Amps@0°F (-18°C) | | 175A |
| Dimension (±2mm) | Length | 207mm (8.15inches) |
| | Width | 71.5mm (2.81inches) |
| | Container Height | 164mm (6.46inches) |
| | Total Height | 164mm (6.46inches) |
| Battery (with acid) | Approx Weight | 5.64kg (12.4lbs) |
| Electrolyte | Approx Weight | 1.54kg (3.40lbs) |
| Terminal type | | F |
| Battery type | Conventional Flooded (High Perfoemance) Series | |
| Full Charge | Constant-Voltage Charge: | |
| | Initial charging current | Less than 0.3$C_{10}$ |
| | Voltage | 14.40V~15.00V at 25°C (77°F) |
| | Charging time | 16~24h |
| | Constant-Current Charge: | |
| | Charging current 0.1$C_{10}$, when charging voltage up to 15.60V, continue to charge 2h | |
| Floating Charge | Initial charging current | Unlimited |
| | Voltage | 13.50V~13.80V at 25°C (77°F) |
| Capacity affected by Temperature | 40°C (104°F) | 106% |
| | 25°C (77°F) | 100% |
| | 0°C (32°F) | 86% |
| | -15°C (5°F) | 65% |

## Discharge Characteristics (25°C, 77°F)

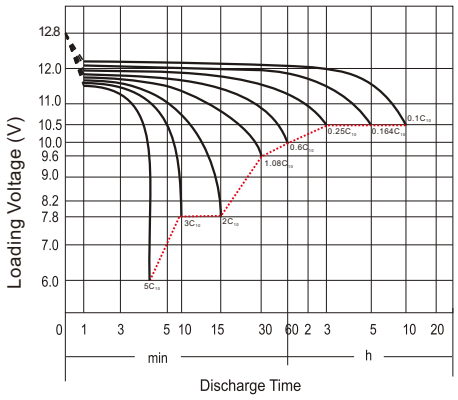


## GENERAL FEATURES

- Low maintenance
- High performance and dry charged high quality and flooded battery
- Shipped in dry condition with a separated acid pack

*Values are subject to variation of +/- 5% in normal manufacturing processes.

**Leoch International Technology Ltd.**
www.leoch.com

**Leoch Batteries Pte Ltd**
www.leoch.sg

**Leoch Battery Corporation**
www.leochamericas.com

**Leoch Europe S.A.**
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
© LEOCH. All rights reserved.Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.Subject to revisions without prior notice. E&OE.

Publication No.:LB-LB16AL-A2-PD-EN-V2.0-20251209